

# ElectroWhisper



## AIR EXCHANGE



ElectroWhisper 500/700 is ideal when an air change is needed but there is no electricity available, the monocrystalline silicon photovoltaic module guarantees power to the aspirator even in the absence of direct sunlight.

The low absorption (500mq / h = 14watt - 700mq / h = 30watt) of the propulsion system allowed to reduce consumption like no other vacuum cleaner on the market with the same flow rate, the depression is 0.2 millbar.

## AIR EXCHANGE EXTERNAL LIFTS

The external lifts and in particular those located in the SOUTH are made with closed structures without any natural ventilation, The power supply of the ElectroWhisper through a photovoltaic module makes it independent from the electricity grid. No connection to the lift control unit (current regulations prohibit any connection unrelated to the operation of the lift). The weight and small dimensions (15 kg) allow installation via a simple mobile platform even on existing roofs with reduced plate thicknesses.

The silent operation is appreciated by the tenants of the top floors adjacent to the extractor.

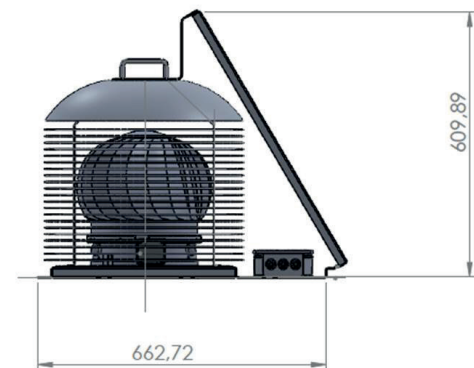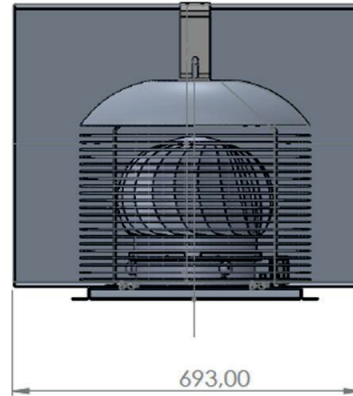

**Anti-hail screen in stainless steel sb 31**

**Grid grille in sb 31 stainless steel**

**Structure in anodized aluminium**

**Stainless steel impeller**

**Impeller bearing (n 2) in oil bath**

**Weight 15 kg**

**Depression 0,2 m AR**

**CE marking**

M <sup>3</sup> /h	V .cc	Consumo	IP	Rumorosità
300	13	--	65	<35db